




Razorback MaxxDry XLGR 140SS Installation and Operations Manual

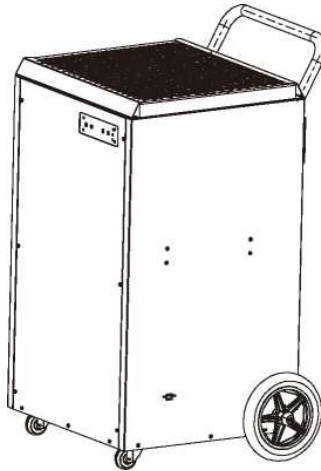

READ AND SAVE THESE INSTRUCTIONS
Razorback Cleaning & Restoration Equipment

194D Zillmere Road, Boondall, QLD 4034

Tel:1800 68 68 69

E-mail:sales@ccwarehouse.com.au

Table of Contents

WARNING	2
Important Notes.....	3
Warranty Registration	3
Specifications	4
How it Works	4
Installation.....	4
Key Functions	5
Indicator Lights	6
Remote Control	7
Operating Instructions	8
Unit Diagram.....	9
Maintenance	10
Dehumidifier Storage	12
Troubleshooting	13
Spare Parts.....	14
Warranty Information.....	15



- **The appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction.**
- **Children being supervised not to play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.**
- **Ensure that the fan is switched off from the supply mains before removing the guard.**
- **If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.**

DEHUMIDIFIERS

■ Important Notes

- Always connect your dehumidifier using a grounded electrical connection (as required for all electrical appliances). The use of non-grounded wiring will void the warranty.
- Your dehumidifier should only be repaired by a qualified technician.
- Do not use the dehumidifier in standing water. If there is a chance that the dehumidifier has been flooded, unplug the unit, remove the cover, and allow it to dry completely before proceeding.
- Do not insert objects or your fingers into the inlet or discharge.
- Do not use water to clean the exterior of the dehumidifier. To clean unit, unplug from power, then use a damp cloth to wipe the exterior.
- Do not stand on dehumidifier or place objects on it.
- Do not use with extension cord or plug adapter.
- Unless otherwise noted, all maintenance should be done with the unit powered off.
- The unit must be used in the upright position.
- Do not restrict airflow in to or out of the unit. This may cause the unit to overheat.

■ Warranty Registration

Your dehumidifier comes with an extensive warranty.

For future reference, write down the model, serial number, and date of purchase for your dehumidifier. This information is necessary for seeking assistance in the future and can be found on the data label on the side of the unit.

Model Number: Razorback Cleaning & Restoration Equipment Razorback MaxxDry XLGR
140SS.

Serial Number _____

Date of Purchase: _____

For additional questions concerning your dehumidifier, contact your local installer or call Razorback Cleaning & Restoration Equipment at 1800 68 68 69.

■ Specifications

Water removal per day (26°C-60%, AHAM):66 L
Airflow: 440 CFM, 680 CMH
Operating Temp. Range: 1-40°C
Operating Relative Humidity Range: 35~90%
COP: 5.5L/kWh
Refrigerant: R290
Amperage Usage: 7.1A
Power Supply:220V/50Hz
Sound Level: 60 dBA
Item Dimensions (LxWxH):460×490×860mm
Package Dimensions (LxWxH): 575×550×930mm
SAA Listed: Yes

■ How It Works

Razorback Cleaning & Restoration Equipment dehumidifiers use an integrated humidistat to monitor the conditioned space. When the relative humidity goes above the selected setpoint, the dehumidifier will energize. Air is then drawn across an evaporator coil, which is cooler than the dew point of air. This means moisture will condense out of the air. The air is then reheated through the condenser coil and distributed back into the room.

■ Installation


1. Place dehumidifier on a level surface.
 - Do not place unit directly on vapor barrier. For example, use blocks or pavers to create a level surface.
 - If unit has been turned or flipped so that the compressor did not remain upright, place the unit on a level surface and wait a minimum of 2 hours before proceeding.
2. Set up the drain line
 - Locate the dehumidifier near a suitable drain (6m drain hose included). Allow for proper drainage and routing of needed drain pipes.
 - Connect the drainpipe to the quick connector of the dehumidifier before placing the drain pipe into the sewer.
 - The dehumidifier is equipped with a built-in drainage pump to support the drainage height of 4.5m.
3. Plug dehumidifier into grounded 15 amp circuit.

Key Functions



1. Power Key

- Use this button to turn the dehumidifier on and off.

-Press once to turn machine on. You will hear two beeps and the  light will illuminate green (solid or flashing depending on mode).

- Press the power button a second time and you will hear one beep as the machine shuts down. Note that there is a 1-minute fan delay.

2. Arrow Buttons

-Use the up and down arrow buttons to set the desired humidity setpoint on the display screen.



- The setpoint can be any number between 36%-90%. When the indoor humidity is higher than the setpoint, the unit will operate.
- Keep in mind that the displayed humidity levels are approximate (+/-5%)

3. Continuous Mode

- To set the unit to run continuously regardless of humidity, simply use the down arrow key to set the humidity below 36%.
- The continuous light will illuminate green and the display will show "CO".
- To switch back to normal humidistat operation, use the arrow keys to move the setpoint above 36%.

4. Manual Drain Button

- If you need to store or move your dehumidifier, press the "Drain" button to remove water from the integral pump reservoir.

Indicator Lights



1. Humidity Display Screen

- The display screen has two functions:
 1. When the unit is powered on, it shows the humidity of the space.
 2. When setting the desired humidity level, the screen will show the set point. After a brief delay, it will revert to current humidity of the space.



Power

2. Power Indicator Light

- This light indicates that the unit is properly powered on and ready to operate.
- Always make sure the unit is “off” prior to performing any service, unless otherwise indicated.
- If the humidity is above the setpoint, the light will be solid green and the machine will operate.
- If the humidity is below the setpoint, the unit will be in standby mode and the light will be flashing.



Cont.
Defrost

3. Continuous Mode/ Auto Defrost Light

- When the light illuminates green, it indicates that the dehumidifier is set to the continuous operation mode.
- When the light illuminates red, it means the unit is in auto defrost mode and clearing the evaporator coils of any ice buildup.



Comp

4. Compressor Light

- When the light illuminates red, it indicates the compressor has been initiated but is currently warming up.
- Once the light switches to green, it means the compressor is currently in working status.

■ Remote Control Instructions

Razorback Cleaning & Restoration Equipment Dehumidifiers can be controlled using an optional remote accessory. The remote connects to your dehumidifier via a 7.62m CAT 5 cable, with the integrated sensor giving you multiple options for monitoring surrounding conditions.

Example #1 - Install the dehumidifier in the laundry room and duct it into the living room. Mount the remote in the living room and use the remote sensor.

Example #2- Install the dehumidifier in your crawl space with the remote mounted in your garage.

NOTE: The symbols indicated below only show when the remote is powered on.

1. On/Off (Power) Button

Press the on/off button and the machine will start running (two beeps). Press the button again to turn the machine off.

2. Up Button/ Down Button

Use the up and down arrows to adjust the humidity level.

3. Mode

Use the mode button to switch between dehumidifier and a ducted application.

- The ☉ symbol on the display indicates the sensor on the remote control is being utilized.
- The ♠ symbol on the display indicates the sensor on the dehumidifier is being utilized.

4. Temperature


Press the temperature button to display the current temperature on the screen.

5. Continuous

Press this button to switch the unit into continuous mode. "CONT." will appear on the display screen.

6. Drain Pump

Use this button if the unit will not be used for an extended period of time. This button will remove water from the pump reservoir.

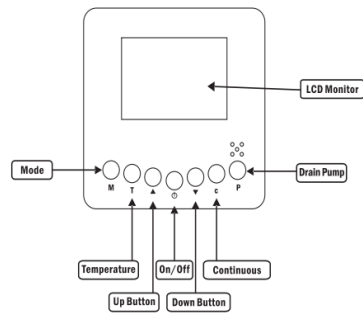

■ Operating Instructions

1. Start the machine

- Press the power key to turn the dehumidifier on.

2. Adjust the settings

- Use the up and down arrow keys to adjust your desired setpoint (typically 50-55%)

3. Stop the machine


- Press the power button again and the dehumidifier will stop. Note that the fan will continue to operate for 1 minute after the unit has shut off.

DO NOT DISCONNECT THE POWER CORD TO FORCE THE UNIT TO STOP.


4. Water Drainage

- The Razorback Cleaning & Restoration Equipment Razorback MaxxDry XLGR 140SS has an integrated condensate pump. During normal operation, the Razorback MaxxDry XLGR 140SS will automatically drain as required.
- If you would like to store or move your unit, press the drain button to drain water from the pump reservoir. The drain will operate for 15 seconds each time the button is pushed. It may be necessary to push the button more than once.

Unit Diagram

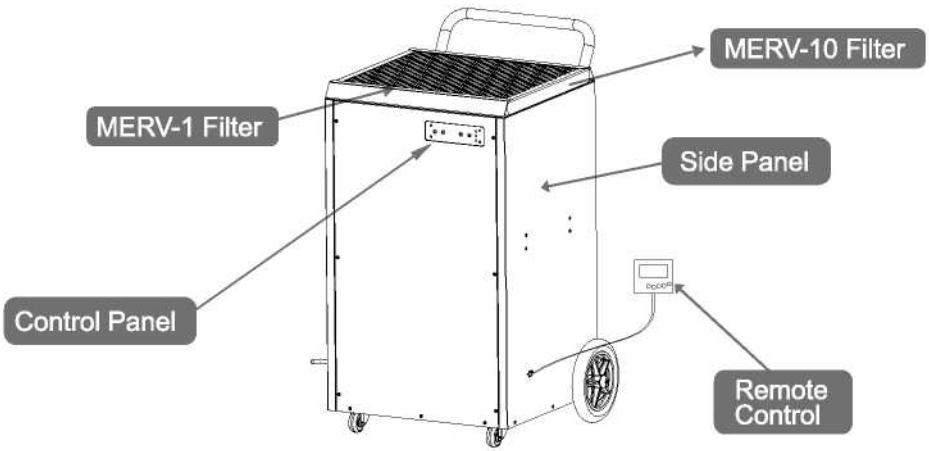

Front View

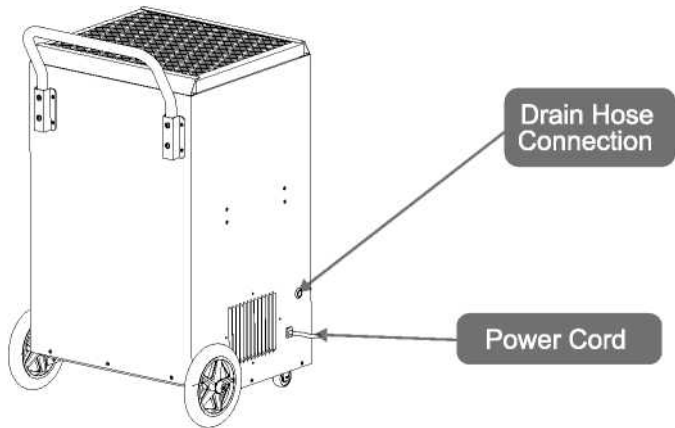

Back View

Maintenance

**For more detailed instructions, visit



WARNING: Always unplug the unit before doing any maintenance.

Cleaning the Machine Body

- Use a soft, damp cloth to clean the exterior of unit Do not use any soap or solvents.

Coil Maintenance

- Once per year, clean the coils with an approved coil cleaner. The coil cleaner should be a self-rinsing, foaming, cleaner, such as WEB® Coil Cleaner.


Cleaning the Filter

1. Unplug the unit.
2. For Pre-Filter:
 - a. Remove prefilter from inlet of machine.
 - b. Vacuum or wash with warm water (no soap).
3. For MERV-1/MERV-10 Filters:
 - a. Replace as necessary- we recommend checking the filters at least 1x/year



Electrical Access

- Unscrew the 7 screws on the front panel.
- Remove the 4 screws on the control board cover.



Pump Maintenance

Your Razorback Cleaning & Restoration

Equipment Razorback MaxxDry XLGR 140SS is equipped with an integral condensate pump designed to pump water from the dehumidifier out to the desired drain.


The pump requires routine maintenance that is not covered by the warranty.

Preventative maintenance is necessary to prevent issues from dirt and slime that may accumulate in the drain system. This includes the drain pan, hose to the condensate pump, pump reservoir, pump head assembly, and discharge tubing.

DEHUMIDIFIERS

Removing the Pump

1. Remove the 7 screws on the side panel and set panel aside.
2. Remove the screw holding the pump in place.
3. Undo the 3 pump electrical quick connects and 1 drain quick connect.
4. Insert a flat head screwdriver into the notch on the side of the pump. This will allow you to gently lift the pump off its reservoir (the reservoir remains attached to the unit).



Basic Pump Cleaning

Complete about once per year, depending on environment

1. Unscrew the 7 screws on the front panel. Press the drain button to drain the reservoir.
2. Disconnect power to the dehumidifier.
3. Mix a 16 ounce solution of bleach (1 oz bleach + 15 oz water) OR vinegar (4 oz white vinegar + 12 oz water).
4. Pour the cleaning solution into the drain tray at the base of the coils.
If any cleaning solution gets on the coils, flush with water.
5. Allow solution to soak for 15 minutes.
6. Reconnect the dehumidifier to power.
7. Fill the reservoir with water (16-32 ounces) and flush/cycle the pump at least 2x.
8. If the drain line is still filled with debris, repeat process. If drain line still does not appear clean, move on to Advanced Cleaning.

1. Press the drain button to drain the water from the reservoir (a wet-dry vacuum or towels can be used to remove any remaining water).
2. Unplug the dehumidifier and remove the cover so you have access to the pump.
3. Remove the pump head from the reservoir by unscrewing the screw.
Wipe reservoir clean with a paper towel.
4. Reassemble pump.
5. Mix a 16 ounce solution of bleach (1 oz bleach + 15 oz water) OR vinegar (4 oz white vinegar + 12 oz water).
6. Pour the cleaning solution into the drain tray at the base of the coils.
If any cleaning solution gets on the coils, flush with water.
7. Allow solution to soak for 15 minutes.
8. Reconnect the dehumidifier to power.
9. Fill the reservoir with water (16-32 ounces) and flush/cycle the pump at least 2x.

■ Dehumidifier Storage

If the unit will be stored for an extended period of time, complete the following steps:

1. Turn off the unit and allow it to dry.
2. Complete steps 1-3 in Advanced Pump Cleaning to clean out the pump reservoir.
3. Wrap and secure the power cord.
4. Cover the filter mesh.
5. Store in a clean, dry space.

■ Troubleshooting

Symptom	Cause	Solution
Display is Blank	Poor Connection	Verify that both ends of the power cord are plugged in.
	Power Outage	Reset power
No AirFlow	Filter is Dirty	Clean the filter
	Air Inlet or Outlet is Blocked.	Clear the blockage
Trouble Code: E1	Humidity Sensor or Communication Error	Check to ensure that the sensor wire is connected at both ends, if no issues are visible, the sensor may be faulty.
Trouble Code: E4	Problem with Pump	Verify that the pump is properly installed and functioning. If so, unplug the unit for two minutes, then restart.
Trouble Code: LO	Room Temperature is below 2°C	Increase the room temperature so it is within operation range (above 2°C). If error still display, check sensor.
Trouble Code: HI	Room Temperature is above 40.5°C	Decrease the room temperature so it is within operating range (below 40.5°C). If error still displays, check the sensor.
E5 Trouble Code	Refrigerant Leak	Contact Your Installer for Assistance.

Pump Alarm- E4 Error Code

****UNIT WILL NOT FUNCTION UNTIL ERROR CODE IS CLEARED.**

If E4 (pump alarm) is shown on the display, complete the following steps:

1. Reset the unit by unplugging the power cord and then reconnecting it.
2. Manually check to see if the pump is operational by pressing the drain button. Check if the pump energizes and de-energizes properly. Additionally, check to see if any water purged from the system.
3. If you haven't cleaned the system recently, check the discharge line for obstruction, then clean as described in the Maintenance section.
4. Replace the hose and/or pump, if maintenance alone isn't sufficient.

■ Spare Parts

Remote Control	
W-100	Remote Control Assembly (includes W-101 and W-102)
W-101	Remote Control
W-102	Remote Control Cable
Display/Control	
N-100	Main Control Board
N-101	Display Board
N-102	RH/Temp. Sensor
Internal Components	
N-801	Compressor
N-118	Compressor Capacitor
N-800	Coil Assembly
N-119	Hot Gas Valve Assembly
N-803	Condensate Pump Assembly

Fan Components	
N-802	Fan Motor
N-804	Complete Fan Assembly
N-117	Fan Capacitor
Filters + External Components	
N-200	MERV-1
N-201	MERV-10
N-202	Wheels
Cables	
N-102	Temp/RH Sensor Cable
N-121	Display Ribbon Cable
N-122	CAT 5 Port Internal Cable
Accessories	
N-105	Remote Control

DEHUMIDIFIERS

Limited Warranty

All warranty benefits apply to the original owner only. Warranty cannot be transferred or assigned.

1 YEAR (FROM DATE OF PURCHASE): Razorback Cleaning & Restoration Equipment warrants the dehumidifier will operate free of defects in workmanship and materials. At its discretion, Razorback Cleaning & Restoration Equipment will repair or replace any malfunctioning components, free of charge (excluding transportation costs).

3 YEARS (FROM DATE OF PURCHASE): Razorback Cleaning & Restoration Equipment warrants the refrigeration circuit (compressor, condenser and evaporator) will operate free of defects in material or workmanship. At its discretion, Razorback Cleaning & Restoration Equipment will replace defective parts, including factory labor or refrigerant. This does not include transportation.

5 YEARS (FROM DATE OF PURCHASE): Razorback Cleaning & Restoration Equipment warrants the compressor, condenser, and evaporator will operate free of any defects in material or workmanship. At its discretion, Razorback Cleaning & Restoration Equipment will repair or replace the defective parts. This does not include labor, transportation, or refrigerant.

CUSTOMER RESPONSIBILITIES: In order to take advantage of the warranty service, the customer must do the following:

1. Customer must provide normal care and maintenance (including, but not limited to cleaning filters, coils and pumps).
2. Removal and re-installation of unit is the sole responsibility of owner.
3. If customer cannot return unit to certified repair center, all costs associated with freight shipment are borne by the customer. In addition, all duties related to freight shipments, including but not limited to palletizing, wrapping, labeling and pickup are associated with customer.
4. If shipped, customer is responsible for all risk of loss or damage.

Razorback Cleaning & Restoration Equipment Warranty Steps:

1. Once receive goods, customers must log in www.ccwonline.com.au to fill out the warranty Registration form and submit to Razorback Cleaning & Restoration Equipment company. We will receive your purchasing and installation information and save it.

If no warranty registration is sent to us, warranty period will begin the day the shipment left the warehouse. Please be sure to record serial # and date of installation. You will need this information to receive the RA number.

2. If warranty service is necessary, customers must contact Razorback Cleaning & Restoration Equipment Tech Support bysales@ccwarehouse.com.au or local technical service phone to receive a Return Authorization (RA number). Once an RA has been issued, customers should bring the unit to a certified repair center. Razorback Cleaning & Restoration Equipment will arrange the shipping to bring the unit back to the Razorback Cleaning & Restoration Equipment warehouse (at the expense of the customers) if customers are not available.

3. After the unit has been received by Razorback Cleaning & Restoration Equipment (whether at a repair center or the warehouse), Razorback Cleaning & Restoration Equipment will have an initial inspection. If it is determined to be invalid warranty claim (see exclusions below), customers have to pay for all associated repair costs and shipping costs for units repair.

4. Customers can pick up the unit after repair at their own expense for shipping. Units will have a rigorous testing before sending it back to customers.

5. If the unit can no longer be fixed, and it is in the warranty period and determined to be valid claim, we will ship

DEHUMIDIFIERS

the customer a new unit within the same year warranty from the date of replacement.

6. After parts are repaired or replaced by Razorback Cleaning & Restoration Equipment, the original warranty period continues to apply until it meets its deadline.

No extensions to the original warranty period.

Limited Warranty Exclusions

EXCLUSIONS:

DAMAGE DUE TO THE FOLLOWING IS NOT COVERED UNDER WARRANTY

1. ACTS OF NATURE- INCLUDING BUT NOT LIMITED TO:
 - FLOODING
 - FIRE
 - WATER DAMAGE
 - HURRICANE STORM DAMAGE
2. IMPROPER USAGE-INCLUDING BUT NOT LIMITED TO:
 - POOL/SPA/HUB APPLICATIONS
 - MISUSE, ABUSE OR TAMPERING WHETHER INTENTIONAL OR ACCIDENTAL
 - IMPROPER INSTALLATION OR DESIGN
 - IMPROPER VOLTAGE
 - LACK OF NORMAL CARE
 - FAILURE TO FOLLOW INSTRUCTIONS
3. CORROSION
4. FREEZING
5. ANY ADDITIONAL COSTS DUE TO CHANGES IN LAWS OR BUILDING CODES
6. FREIGHT CHARGES
7. ANY COSTS DUE TO LOST PROFIT OR DELAY
8. DAMAGE TO PROPERTY
9. CAUSE BEYOND CONTROL
10. CONSUMABLE PARTS INCLUDING BUT NOT LIMITED TO:
 - FILTERS
 - BATTERIES
 - POWER CORDS
 - VALVES
 - SWITCHES
 - RUBBER PARTS
11. DIRECT, INDIRECT COLLATERAL OR INCONSEQUENTIAL DAMAGES OF ANY KIND

THE WARRANTIES AND LIABILITIES SET FORTH ARE IN LIEU OF ALL OTHER WARRANTIES EXPRESSED OR IMPLIED IN LAW OR IN FACT, INCLUDING IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE. Razorback Cleaning & Restoration Equipment's total liability, regardless of nature of claim shall not exceed original purchase price of the product, if a product or component is replaced while under warranty, the applicable warranty period shall not be extended beyond the original warranty time period.


The foregoing shall constitute the total liability of seller in the case of defective performance of all or any of the equipment or services provided to buyer. Buyer agrees to accept and hereby accepts the foregoing as the sole and exclusive remedy for any breach or alleged breach of warranty by seller.

Any dishonesty or fraud in connection with Razorback Cleaning & Restoration Equipment warranty thoroughly voids all warranty policies. Razorback Cleaning & Restoration Equipment expressly reserves the right to pursue legal action in the event of dishonesty, fraud, or attempted fraud.



SPARE PARTS LIST

MaxxDry XLGR 140SS

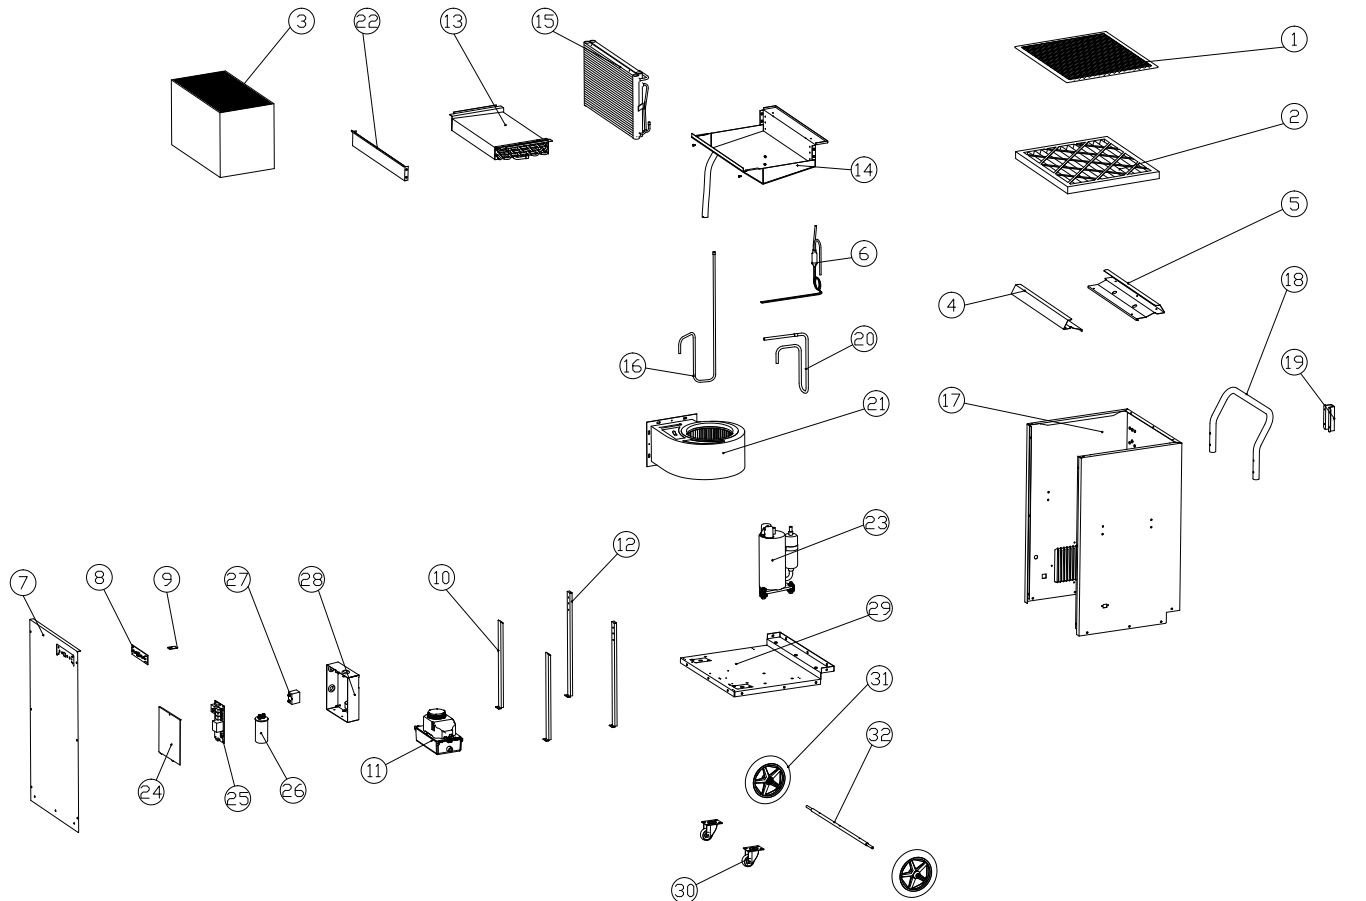

No.	Name	Material	Quantity
1	G1 filter	Component	1
2	G4 filter	Component	4
3	Black box	Component	1
4	Filter conducting bar 1	Stainless steel	1
5	Filter conducting bar 2	Stainless steel	1
6	Capillary	Copper tube	1
7	Front panel	Stainless steel	1
8	Key panel	Component	1
9	Humidity sensor	Component	2
10	Front bracke	Galvanized sheet	1
11	Pump	Component	2
12	Back bracket	Copper tube	1
13	Exchanger	Copper tube	1
14	Water collector	Stainless steel	1
15	Cool exchanger	Aluminum	1
16	High pressure pipe	Galvanized sheet	1
17	Panel	Stainless steel	1
18	Handle	Stainless tube	1
19	Handle bracket	Stainless steel	1
20	Low pressure pipe	Copper tube	1
21	Motor	Component	1
22	Exchanger baffle	Stainless steel	1
23	Compressor		1
24	Electric control box cover board	Stainless steel	1
25	Main control panel	Stainless steel	1
26	Compressor capacitor	35UF-450V	1
27	Motor capacitor	4UF-450V	1
28	Electric control box	Galvanized sheet	1
29	Chassis	Galvanized sheet	1
30	Universal wheel		2
31	8 inches wheel		2
32	Axle	45 # steel	1



Razorback MaxxDry XLGR 140SS Dehumidifier

Model#: MaxxDry XLGR 140SS

Power Supply: 230VAC, 50Hz, 1680W

Thermally Protected Motors

Refrigerant: R410a, 650g High Pressure: 1.9 MPa

Low Pressure: 1.5 MPa

Maximum Design Pressure:

3.5 Mpa High Side.....1.5 Mpa Low Side

Capacity: 104 L/Day @ 30°C, 80% RH

136 Pints/Day @ 26.7°C, 60%RH(AHAM)

Serial Number: R0001 Made in China

Manufactured Date: 2021-08-02

